


**Gardner**  
**Denver**<sup>®</sup>


MODULAR DESICCANT DRYER | 3-177 CFM

# XGMLA Series

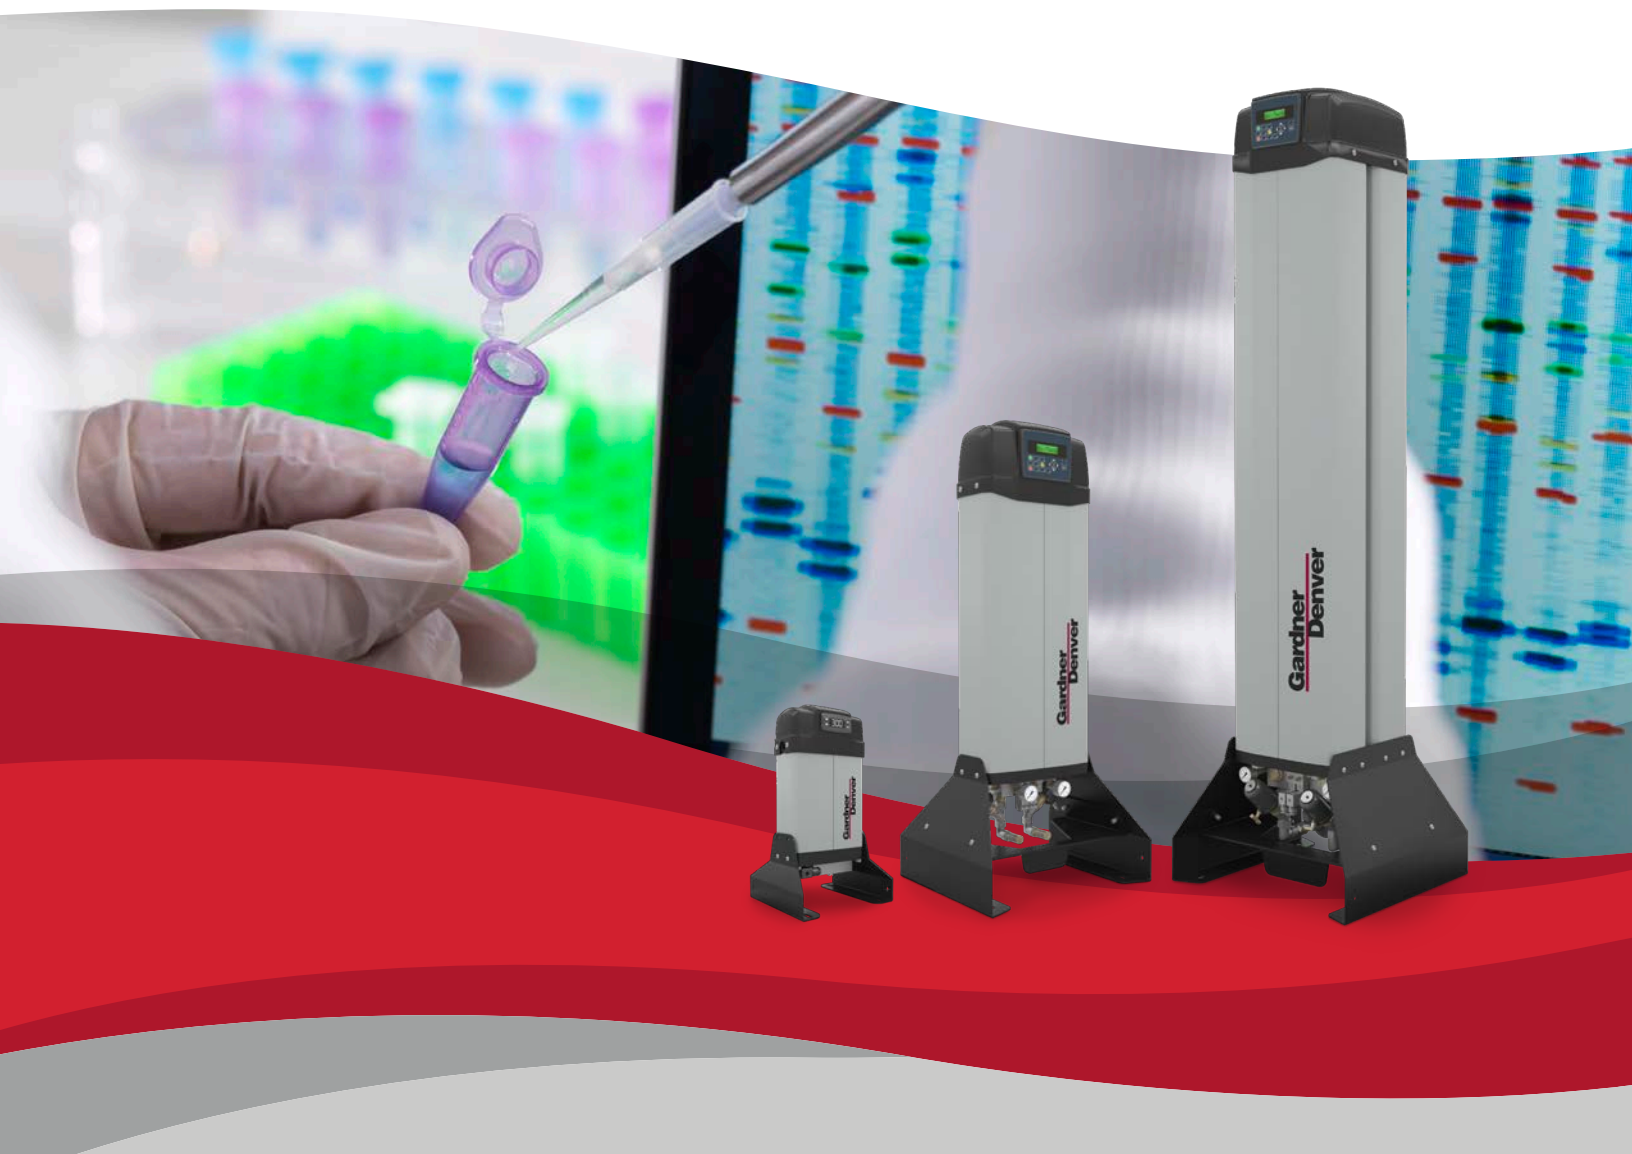

# X Series: NeXt-Generation Gardner Denver Air Treatment

## XGMLA SERIES MODULAR DESICCANT DRYERS



### Improve Air Quality Output, Reduce Operating Costs

Innovative modular air dryers by Gardner Denver make it easier and more affordable than ever to deliver high-quality compressed air for instrumentation, process equipment, or production lines—virtually wherever it is needed:

- High-efficiency filtration and desiccant bed adsorption provide clean, dry air
- Compact, fully integrated units install at point-of-use, so you pay for drying only the air required
- Conservative pressure drop lowers power costs
- Optional energy management system for larger units reduces purge air during partial loads
- -40°F and -100°F PDP models

### Enhance Productivity

Our dryers feature standard ISO Class 2 dewpoint performance, with optional ISO Class 1 to meet the most stringent requirements. This helps prevent corrosion and minimizes production disruptions or losses due to moisture or contamination. And easy on-site maintenance—less than 15 minutes after 12,000 hours of use—gets you back on line quickly.

### Extend Performance Reliability

In addition to being efficient, these simple and easy-to-maintain modular dryers are also an excellent long-term investment:

- Extruded aluminum construction with Alocrom and epoxy painting prevents corrosion
- Compact, modular designs have few moving parts
- Proven, reliable electronic controls, with control panel indication for preventive maintenance, help ensure long-lasting performance
- Warranty coverage you can trust: 12 months from start up or 18 months from shipment



## Promote Environmental Safety

Because noise levels (<75 dB) are so low, Gardner Denver modular dryers can be installed right in the work environment. In addition, the dryer's remote exhaust feature offers further enhanced noise suppression. These refrigerant-free units are also designed with a NEMA 1 enclosure and in accordance with ASME, PED, CSA, UL, and CRN standards.

## SPECIFICATIONS: XGMLA SERIES | MODULAR AIR DRYERS

| MODEL           | CAPACITY |                    | INLET/OUTLET CONNECTION<br>NPT (IN) | MAX. PRESSURE |      | DIMENSIONS<br>W × D × H |                  | WEIGHT |     |
|-----------------|----------|--------------------|-------------------------------------|---------------|------|-------------------------|------------------|--------|-----|
|                 | SCFM     | M <sup>3</sup> /HR |                                     | PSIG          | BARG | INCHES                  | MM               | LB     | KG  |
| <b>XGMLA3</b>   | 3        | 5                  | 3/8"                                | 203           | 14   | 9.4 × 8.3 × 16.7        | 238 × 212 × 423  | 24.2   | 11  |
| <b>XGMLA9</b>   | 9        | 15                 | 3/8"                                | 203           | 14   | 9.4 × 8.3 × 32.4        | 238 × 212 × 823  | 39.7   | 18  |
| <b>XGMLA15</b>  | 15       | 25                 | 3/8"                                | 203           | 14   | 9.4 × 8.3 × 42.2        | 238 × 212 × 1073 | 59.5   | 27  |
| <b>XGMLA24</b>  | 24       | 40                 | 3/4"                                | 203           | 14   | 18.7 × 15.9 × 38.1      | 475 × 405 × 968  | 97     | 44  |
| <b>XGMLA32</b>  | 32       | 55                 | 3/4"                                | 203           | 14   | 18.7 × 15.9 × 44        | 475 × 405 × 1118 | 110.2  | 50  |
| <b>XGMLA41</b>  | 41       | 70                 | 3/4"                                | 203           | 14   | 18.7 × 15.9 × 51.9      | 475 × 405 × 1318 | 132.2  | 60  |
| <b>XGMLA59</b>  | 59       | 100                | 1"                                  | 203           | 14   | 18.7 × 15.9 × 65.9      | 475 × 405 × 1673 | 160.9  | 73  |
| <b>XGMLA88</b>  | 88       | 151                | 1"                                  | 203           | 14   | 18.7 × 15.9 × 73.7      | 475 × 405 × 1873 | 198.4  | 90  |
| <b>XGMLA118</b> | 118      | 200                | 1 1/2"                              | 203           | 14   | 21.1 × 19.5 × 67.1      | 536 × 495 × 1705 | 390.1  | 177 |
| <b>XGMLA147</b> | 147      | 251                | 1 1/2"                              | 203           | 14   | 21.1 × 19.5 × 75        | 536 × 495 × 1905 | 396.7  | 180 |
| <b>XGMLA177</b> | 177      | 300                | 1 1/2"                              | 203           | 14   | 21.1 × 19.5 × 75        | 536 × 495 × 1905 | 414.4  | 188 |

## XGMLA Benefits

- Minimize contaminants, corrosion, energy use
- Reduce costs by treating only the air you need
- Deliver quiet performance on the spot
- Sustain high efficiency with easy maintenance

The leader in every market we serve  
by continuously improving all business processes  
with a focus on innovation and velocity

**Gardner**  

---

**Denver**<sup>®</sup>

1800 Gardner Expressway  
Quincy, IL 62305  
[www.gardnerdenver.com](http://www.gardnerdenver.com)



©2024 Industrial Technologies and Services, LLC  
Printed in U.S.A.  
GA-XGMLA 1st Ed. 12/24  
Supersedes GA-XGML 3rd Ed. 1/22

