




# Design Advantage

- .5-25HP Range
- 80 PSI
- Simplex or Duplex Horizontal tank configurations
- Mounted Dryer option
- Single Stage pump 0.5-1.5HP Utilizes special B1, BVA and BWA pumps
- Two Stage pump 1.5-25HP Utilizes Legendary R-Series pump
- Splash Lubricated

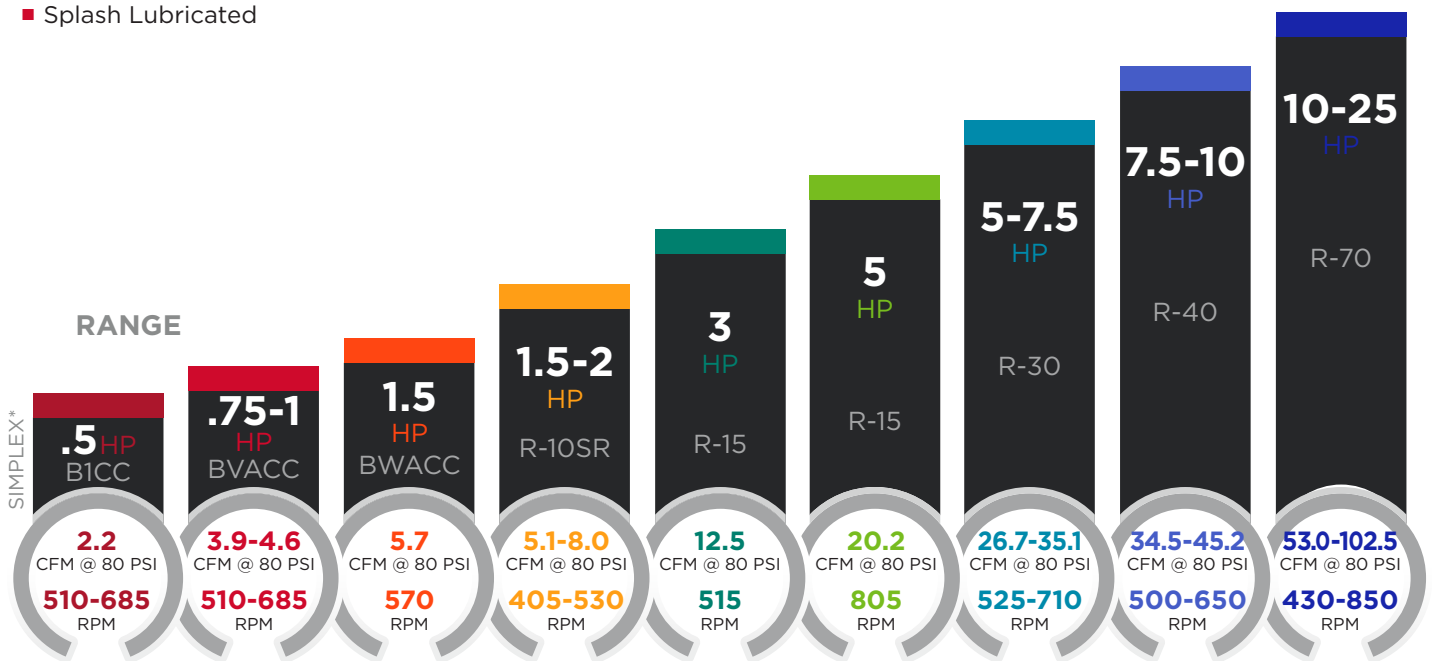

\*Double CFM values for Duplex Units